

PCOCC-A Interconnect Cable with Rhodium Plated 0.5u RCA Plugs

ACROSS 750 RR

PCOCC-A
SUPPORTED BY FURUKAWA



SPECIFICATIONS

RCA PLUG: Rhodium plated 0.5u RCA plug conforming to RoHS Restriction

CONDUCTOR: PCOCC-A

WIRE DIAMETER: 0.75 sq (0.18mm X 30)

STRUCTURE: C.I.S.(Cross Insulated Stabilizer)

INSULATOR: Macromolecule polyolefin

INSULATOR CIRCUMFERENCE: Polyethylene

SHIELD WIRE: PCOCC-A (0.18mm X 100)

SHEATH: Halogen-free sheath for audio exclusive use.


CABLE DIAMETER: 8.0mm

CONDUCTOR RESISTANCE: 8.4Ω/km (at 20°C)

ELECTRIC CAPACITY: 68.0 μF/m

IMPEDANCE: 70Ω

LINEUP: · 0.7m(Pair) · 1.0m(Pair) · 1.3m(Pair)

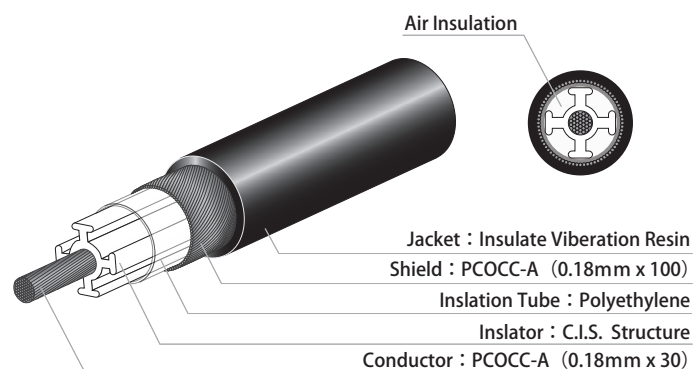

FEATURES

- Oyaide original Rhodium plated 0.5u RCA plug conforming to RoHS Restriction.
- Epoch-making conductor PCOCC-A of three levels inversion kindred spirit twist structure.
- Dynamic, high-response and high-speed sound while keeping superior S/N, delicate and large sound stage.
- Delicate and wide sound stage by PCOCC-A conductor with “Cross Insulated Stabilizer”
- Recommendable for audiophiles who is demanding wide-ranged and High definition sound, wide and delicate sound stage, or who already are using ACROSS 2000 cable.