


ACROLINK®


7N Cu MEXCEL DIGITAL & INTERCONNECT CABLE SERIES
Stressfree 99.99999% Purity Copper

7N-DA6300II MEXCEL

INTERCONNECT CABLE RCA

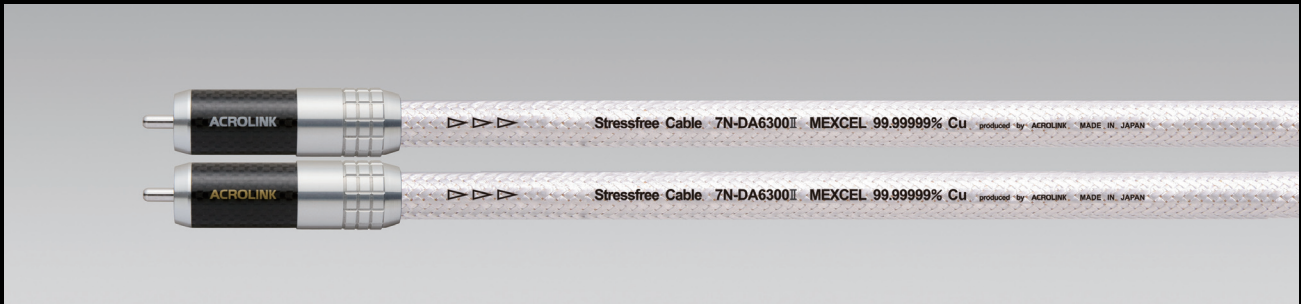

INTERCONNECT CABLE XLR

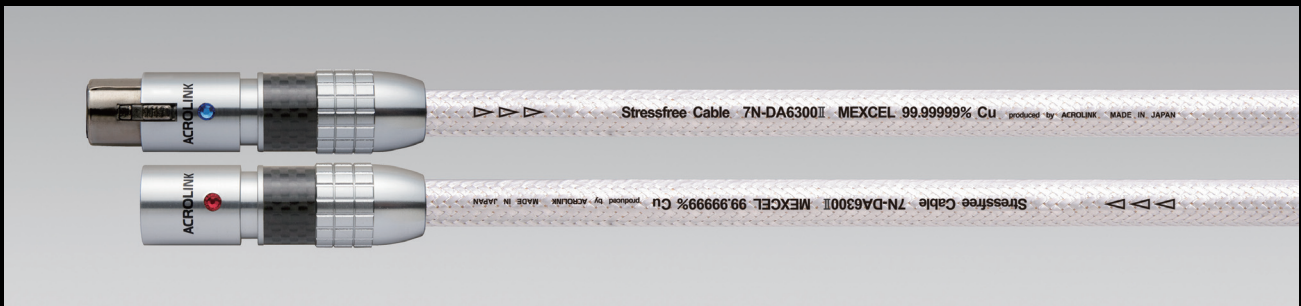

DIGITAL CABLE AES/EBU



SPECIFICATIONS

Conductor	: 7N Cu MEXCEL Solid Core 1.6φ×2 (Balanced twin-core structure)
Insulation	: Teflon
Shielding	: Flat MEXCEL braided wire + Copper clad mylar tape + Silver plated copper braided wire
Outers sleeve	: UV resistant Polyurethane
Conductor resistance	: 9.2mΩ/m
Electrostatic capacitance	: 40pF/m
Impedance	: 110Ω(XLR & AES/EBU)
Cable diameter	: 11.3mm

RCA CONNECTOR

Positive terminal	: Beryllium 50 copper
Negative terminal	: Phosphors copper
Plating	: Mirror polish treatment with silver layered rhodium plating
Outer body material	: Aluminum + Carbon fiber + Duralumin

XLR CONNECTOR

Male contact terminal	: Tellurium copper
Female contact terminal	: Beryllium 50 copper
Terminal plating	: Direct rhodium plating
Outer body material	: Aluminum + Brass + Carbon fiber

7N-DA6300II MEXCEL (Balanced twin-core+shield)

